

FIG. 1 is a perspective view of a device 100, which includes a handle 110 and a head 120. The handle 110 is formed of a material having a high tensile strength and is provided with a series of longitudinal slots 112. The head 120 is formed of a material having a high tensile strength and is provided with a series of longitudinal slots 122. The device 100 is adapted to be used for a variety of purposes, including as a tool for cutting or for gripping.

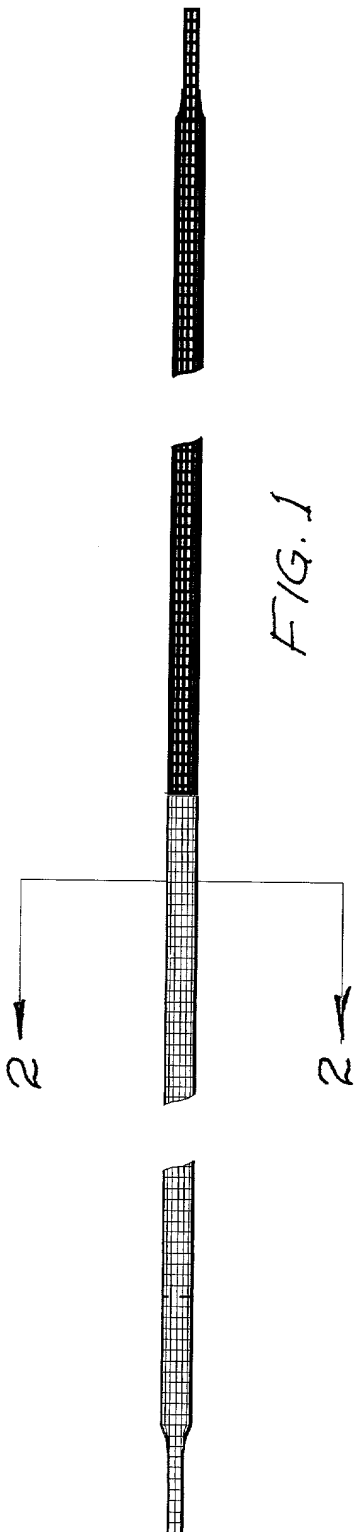


FIG. 1




FIG. 2

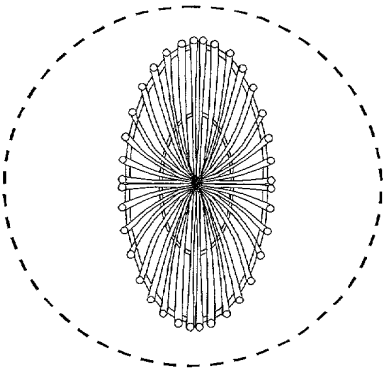


FIG. 90



FIG. 4

95



FIG. 5

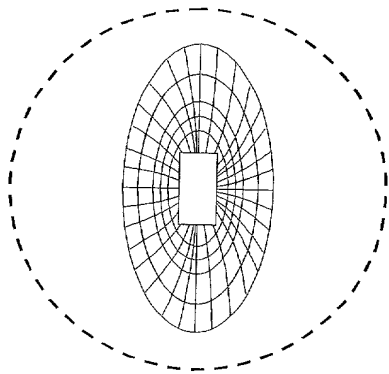


FIG. 95

FIG. 91 is a perspective view of a first embodiment of a device in a first state. FIG. 92 is a perspective view of a second embodiment of a device in a first state. FIG. 93 is a perspective view of a third embodiment of a device in a first state. FIG. 94 is a perspective view of a fourth embodiment of a device in a first state.




FIG. 91




FIG. 92



FIG. 93







FIG. 94

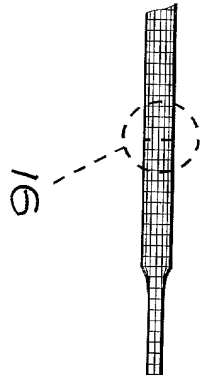


91

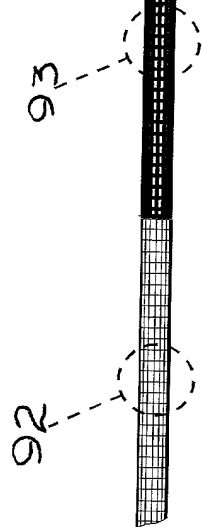

92

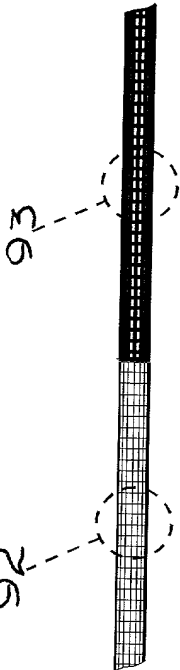

93

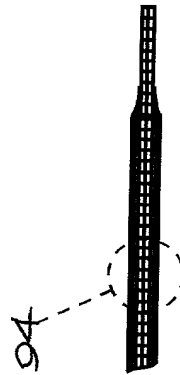

94

FIG. 3



FIG. 4